




1		2		3		4		5		6	
No.	Specification			Unit	Q'ty	No.	Specification			Unit	Q'ty
1	M623 铆压式母针 Rivet-Pressed Female Pin			pc	6~17	8	屏蔽压线盖 Cable Shield Cover			pc	1
2	M623 内螺牙连接套 Internal Threaded Connection Sleeve			pc	1	9	防水O型圈 Waterproof O-Ring			pc	1
3	M623 前盖胶芯 Front Cover Rubber Core			pc	1	10	锁线网尾套 Locked Wire Mesh End Cap			pc	1
4	M623 连接套卡簧 Connection Sleeve Retaining Spring			pc	1	11	锁线防水套 Locked Wire Waterproof Sleeve			pc	1
5	M623 后盖胶芯 Rear Cover Rubber Core			pc	1	12	紧锁螺帽 Lock Nut			pc	1
6	M623 胶芯固定套 Rubber Core Retaining Sleeve			pc	1						
7	直式主体 Straight Body			pc	1						

芯位排布 Pin Layout

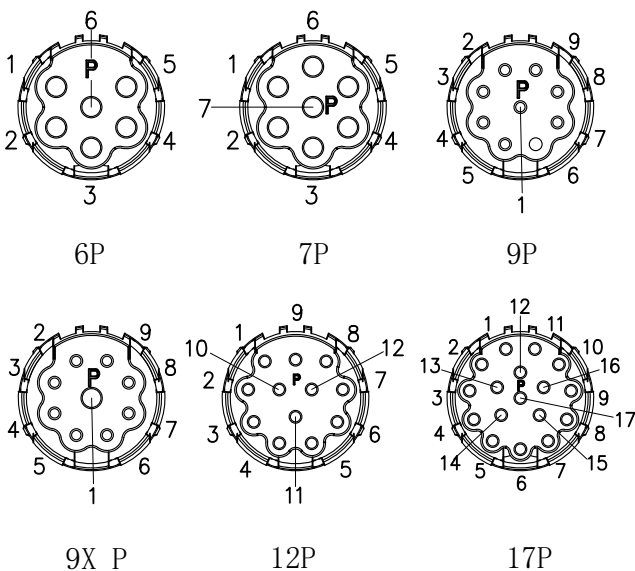


A: Crimp-Type Female Pin Compatible Wire Gauge :


M623 2.0 铆压式母针 适配线规: 18~13AWG A120102-0147

M623 1.0 铆压式母针 适配线规: 17~16AWG A120102-0148

Crimp-Type Female Pin Compatible Wire Gauge : 20~17AWG A120102-0149

: 28~20AWG A120102-0222

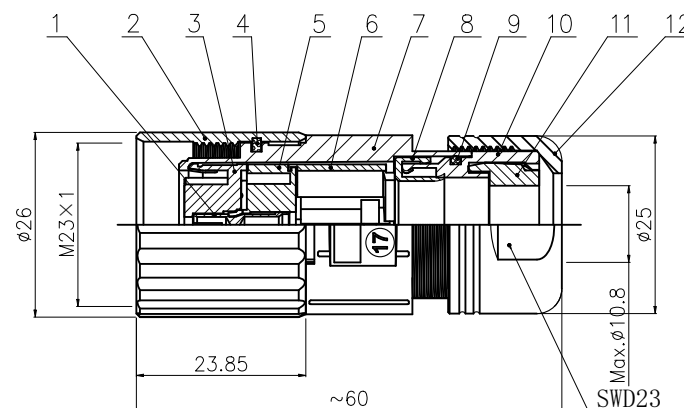

GENERAL TOLERANCE (UNLESS SPECIFIED)							绘图 DWN			W.M 2022.9.19			
芯数	6	7	9	9X	12	17	≤10 ±0.2	确认	CHK			品名	M623直式孔型金属组装插头 P编码
额定电压 Rated voltage	300V	300V	150V	300V	150V	150V	<10~≤20 ±0.5	核准	APVD			TITLE	
额定电流 Rate current	20A	20A	8A	8A/20A	8A	8A	<20~≤50 ±0.1					品号	M623 Straight-Type Metal Assembly Plug
额定脉冲电压 Rated Impulse Voltage	2500V	2500V	2500V	2500V	2500V	2500V	Angle ±1°	单位	UNIT	MM	版本	PART NO	with P-Coding, iivet-Pressed, PG11 Cable
绝缘电阻 (MΩ) Insulation Resistance	≥100	≥100	≥100	≥100	≥100	≥100		尺寸	SIZE	A4	页码	DRAWING NO	Entry Port
接触电阻 (mΩ) Contact Resistance	≤5	≤5	≤5	≤5	≤5	≤5		1 OF 1				型号	ULO-M623-SxP-GCAP11