


Ningbo Best Group Co., Ltd

Fixed inductors for surface mounting
EDRH8D28 SERIES


FEATURES/特点

- Excellent solderability and high heat resistance.
- Suitable for large currents.
- Is applicable to a wide range of DC-DC converters ideal For (DVD;DSC;phone; PDA;GPS;CMMB; Digital photo, Frame, telephone; CAR AV equipment and so on.)
- Current Rating: Based on the largest decline in ICP to 35 percent, and the temperature does not exceed 40degrees.
- Measuring frequency: 100KHz/0.25V

DIMENSIONS(mm) 外型尺寸

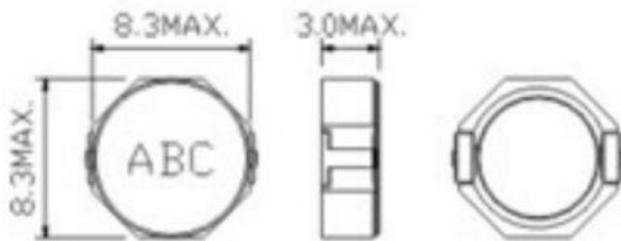

LAND PATTERNS(mm) 焊盘尺寸

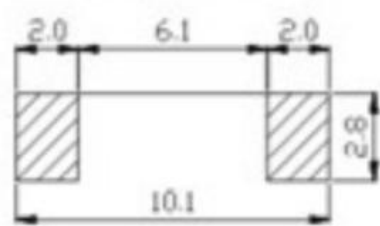

Type 型号	Indicate 表示	Inductance 电感量 (μH)	D. C. R (Max) 直流电阻 (mΩ)	Rated Current 饱和电流 (A)
EDRH8D28-2R2M	2R2	2.2μH±20%	15.6	4.50
EDRH8D28-3R3M	3R3	3.3μH±20%	18.2	4.00
EDRH8D28-4R7M	4R7	4.7μH±20%	24.7	3.40
EDRH8D28-100M	100	10μH±20%	47.0	2.50
EDRH8D28-150M	150	15μH±20%	69.0	1.90
EDRH8D28-220M	220	22μH±20%	99.0	1.60
EDRH8D28-330M	330	33μH±20%	156	1.30
EDRH8D28-470M	470	47μH±20%	195	1.15
EDRH8D28-680M	680	68μH±20%	286	0.92
EDRH8D28-101M	101	100μH±20%	430	0.75

- Design according to customer requirements.
- Data recorded for reference only, all to provide samples of business shall prevail.
- Recorded content may be improved or changed without notice.