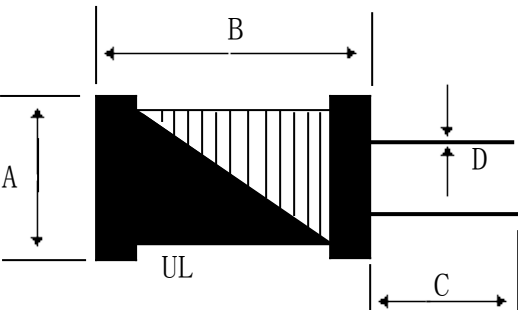


F B E L E

| | | | |
|---|--------------|-----------------|--------------|
| Customer | | Date | 21. 08. 2023 |
| PN | FB1012-100uH | | |
|  | | A | 10+-1mm |
| | | B | 12+-1mm |
| | | C | 15mm |
| | | D | 0.65mm |
| | | Adhesive materi | UL |
| Main electrical characteristics and technical indicators | | | |
| Inductance | L1-100uH±10% | stele | 4MM |
| umber of turn | 48t | DCR | |
| Rated current | | Test freq | 1KHZ |
| wire | | Wire size | 0.4MM |

| | | | |
|---------------|--|----------|------|
| Magnetic core | | Material | RoHS |
|---------------|--|----------|------|