

RS1A THRU RS1M

SURFACE MOUNT FAST RECOVERY RECTIFIERS

Reverse Voltage – 50 to 1000 V

Forward Current – 1 A


Features

- High current capability
- High surge current capability
- High reliability
- Low reverse current
- Low forward voltage drop
- Fast switching for high efficiency

Mechanical Data

- **Case:** SMA (DO-214AC) molded plastic
- **Mounting position:** Any
- **Lead:** Lead formed for surface mount
- **Polarity:** Color band denotes cathode end

SMA (DO-214AC)

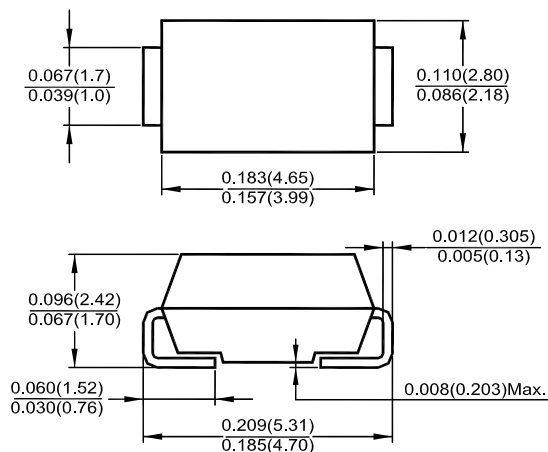

Dimensions in inches and (millimeters)


Absolute Maximum Ratings and Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	RS1A	RS1B	RS1D	RS1G	RS1J	RS1K	RS1M	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current at $T_a = 90^\circ\text{C}$	$I_{F(AV)}$	1							A
Peak Forward Surge Current 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	35							A
Maximum Forward Voltage at $I_F = 1\text{A}$	V_F	1.3							V
Maximum DC Reverse Current at $T_A = 25^\circ\text{C}$ at Rated DC Blocking Voltage at $T_A = 100^\circ\text{C}$	I_R	5 50							μA
Maximum Reverse Recovery Time ¹⁾	t_{rr}	150				250	500		ns
Typical Junction Capacitance ²⁾	C_J	50							pF
Operating and Storage Temperature Range	T_J, T_S	- 65 to + 150							$^\circ\text{C}$


¹⁾ Reverse recovery test conditions $I_F = 0.5\text{ A}$, $I_R = 1\text{ A}$, $I_{rr} = 0.25\text{ A}$.

²⁾ Measured at 1 MHz and applied reverse voltage of 4 V.










SEMTECH ELECTRONICS LTD.


(Subsidiary of Sino-Tech International Holdings Limited, a company
listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 11/04/2008

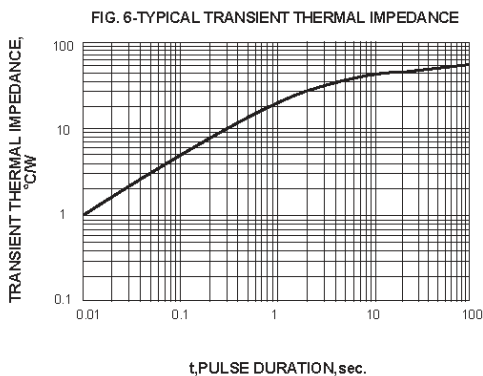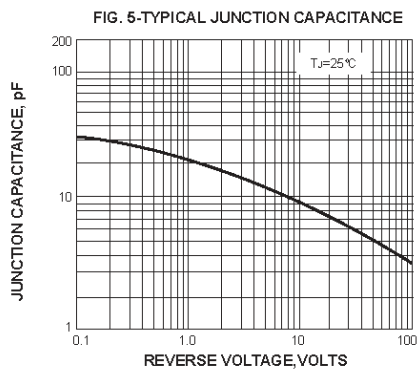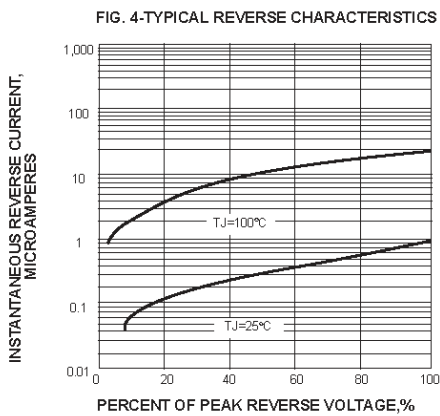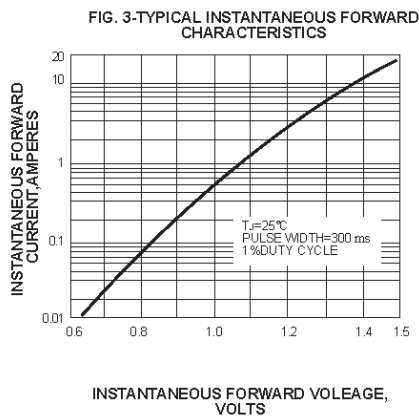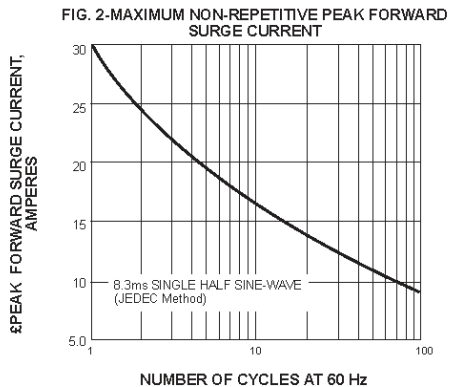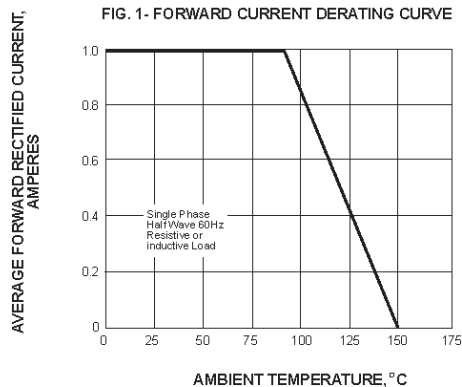

SEMTECH ELECTRONICS LTD.
(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 11/04/2008